



GUARDIAN ACCESS 2U

MODEL GDN.S.48.M28

2U Integrated DC Power System

-48VDC | 100A | 5.4kW



LVD2006/95/EC
EMC2004/108/EC
ROHS2011/65/EU




KEY FEATURES

- ◆ >96% Efficiency Rectifiers
- ◆ 100A / 5.4kW Load Capacity
- ◆ Remote Monitoring & Control
- ◆ Field Replaceable Controller
- ◆ Ethernet Comm. with SNMPv3
- ◆ 3 LED Alarm/Status Indicators
- ◆ Up to 10 Form-C Relay Alarms
- ◆ Up to 6 Load Breakers
- ◆ 2 Battery Breakers
- ◆ LCD Display/Touchpad
- ◆ Easy Installation

SAFETY COMPLIANCE

UL60950-1 2nd Ed.
CSA22.2 No. 60950-1 2nd Ed.
EN60950-1 2nd Ed.

TWO-YEAR WARRANTY

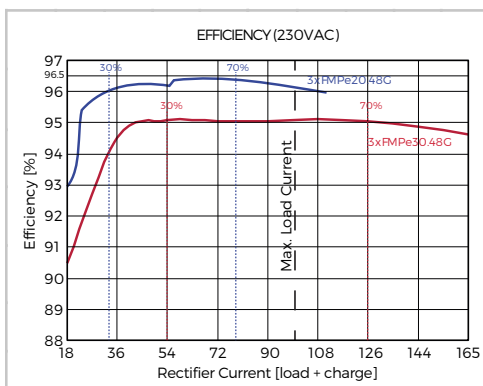

DESCRIPTION

Guardian Access 2U is a 2RU high 19" rack-mounted, integrated DC power system providing an output of -48VDC. These systems can accommodate up to 3 Guardian family high efficiency hot-swap rectifiers. A total load current of 100A / 5.4kW is available with battery charge current up to 65A in addition. The rectifiers are internally fan cooled with speed control which is a function of load and temperature, keeping acoustic noise to a minimum.

The DC output circuits can provide up to 6 loads which utilize circuit breakers rated from 4A to 150A. 2 additional 80A, 100A or 125A breakers provide battery protection. A programmable 125A low voltage battery disconnect (LVD) is standard while a partial load disconnect (PLD), also rated at 125A and programmable, can provide non-critical load shedding when operating on batteries.

The ACC Extended remote access controller monitors system parameters, controls rectifier output, and provides alarms for system failures. The Controller Module is also pluggable for easy field replacement in case of failure. There are 2 LED alarm indicators which indicate failures, (RED) Alarm and (YELLOW) Message. A third green LED indicates the controller is working properly. As standard four form-C relay outputs provide the alarms for remote use. An additional 6 can be included as an option. Two digital inputs and outputs are also provided as well as a microSD card slot that accepts an up to 4GB card which is sufficient for more than 20 years data logging.

The system can be programmed by means of a remote PC web page display. Communication is by Ethernet LAN with SNMPv3 including alarm trapping. It also has provision for temperature compensated charging of an external battery using a supplied TC probe. An LCD Display/Touchpad is included for local metering, status, and setup.

The Guardian Access 2U is compatible with UNIPOWER's free [PowCom™ software](#) which offers local and remote management through an advanced Windows GUI.

www.unipowerco.com

NORTH AMERICA CALL: +1-954-346-2442 • EUROPE CALL: +44 (0)1903 768200

SYSTEM SPECIFICATION & CAPABILITY GUIDE

SYSTEM DESIGNATION	GUARDIAN ACCESS 2U - 1-MS0028G	
OUTPUT		
System Voltage	-48VDC nominal 53.5VDC float	
Maximum Capacity @ 120VAC nominal	Load	70A
	Battery	70A discharge 35A charge (s/w controlled)
Maximum Capacity @ 230/400VAC nominal	Load	100A
	Battery	100A discharge 65A charge (s/w controlled)
No. Rectifier Slots	3	
DC DISTRIBUTION		
Loads Circuits	6 x 13mm or 5 x 18mm (4A to 150A - see configuration guide on page 5)	
Battery Circuits	2 x (80A, 100A or 125A)	
INPUT		
Voltage (nominal)	1-phase 100-120/200-240VAC (L + N + PE) 3-phase 230/400VAC (L1 L2 L3 + N + PE)	
Frequency	47-63Hz	
Maximum Input Current	50A @ 100-120VAC 39A @ 200-240VAC 13A per phase @ 400/230VAC	
Rectifier Power Factor	>0.98 (typical)	
Surge Protection	Optional (see configuration guide on page 5)	
MONITORING & CONTROL (ACC Extended Controller)		
Alarm Relays	4 standard, option for 10	
Local Interface	4 x 20 LCD, 4-key menu, USB / RS232, microSD card slot (4GB max.) for data logging	
Remote Interface	Ethernet / Modem using PowCom™ software package Ethernet port allows monitoring and control over a TCP/IP network. Web browser support + SNMPv3	
LED Indications	Green - System ON; Yellow - Message(s); Red LED - Alarm(s)	
External Digital I/O	2 x Inputs, 2 x Outputs (TTL Level)	
BATTERY MANAGEMENT		
Symmetry Inputs	6 or 12 (can be redefined as analog inputs up to 100VDC)	
Low Voltage Battery Disconnect (LVD)	1 x 125A Programmable	
Partial Load Disconnect (PLD)	1 x 125A Programmable (Optional)	
Temperature Compensated Charging	Programmable	
COMPLIANCE		
EMC	EN 300 386 ; EN61000-6-3 (Emission) ; EN61000-6-2 (Immunity)	
Safety	IEC60950-1:2005 2 Ed. +A1:2009	
ENVIRONMENTAL		
Operating Temperature	-40°C to +55°C	
Storage Temperature	-40°C to +85°C	


RECTIFIER MODULES vs. SYSTEM CAPACITIES

RECTIFIER MODULES						SYSTEM CAPACITY		
MODEL NUMBER	EFFICIENCY ¹	INPUT VOLTAGE ²	INPUT CURRENT ³	OUTPUT POWER	OUTPUT CURRENT	MAX. CHARGE CURRENT	MAX. LOAD CURRENT	
							TOTAL	2+1 ⁵
FMPe20.48G	>96.0%	85-180VAC	9.6A	1100W ⁴	20.6A ⁴	35A ⁴	62A ⁴	41A ⁴
		180-275VAC	11.6A	2000W	37.4A	65A	100A	75A
FMP25.48G	>92.5%	85-180VAC	14.4A	1400W ⁴	26.2A ⁴	35A ⁴	79A ⁴	52A ⁴
		180-275VAC	16.8A	2500W	46.7A	65A	100A	100A
FMPe30.48G	>95.0%	85-180VAC	15.7A	1700W ⁴	31.8A ⁴	35A ⁴	70A ⁴	75A ⁴
		180-275VAC	17.0A	2900W	54.2A	65A	100A	100A


Notes:

- When operating at 230VAC.
- All models will operate over the full range, automatically limiting output current/power according to the actual input voltage range applied.
- Input currents shown are expected maximums at 85VAC/180VAC as appropriate
- Figures quoted are at 110VAC input. Derating is linear from 180VAC to 85VAC. See separate rectifier datasheets for details
- May require reduction in maximum charge current when batteries not fully charged.
- Rectifier model FMP25.48G is not a preferred model for new requirements. It remains available for existing programmes.


FRONT PANEL DESCRIPTION

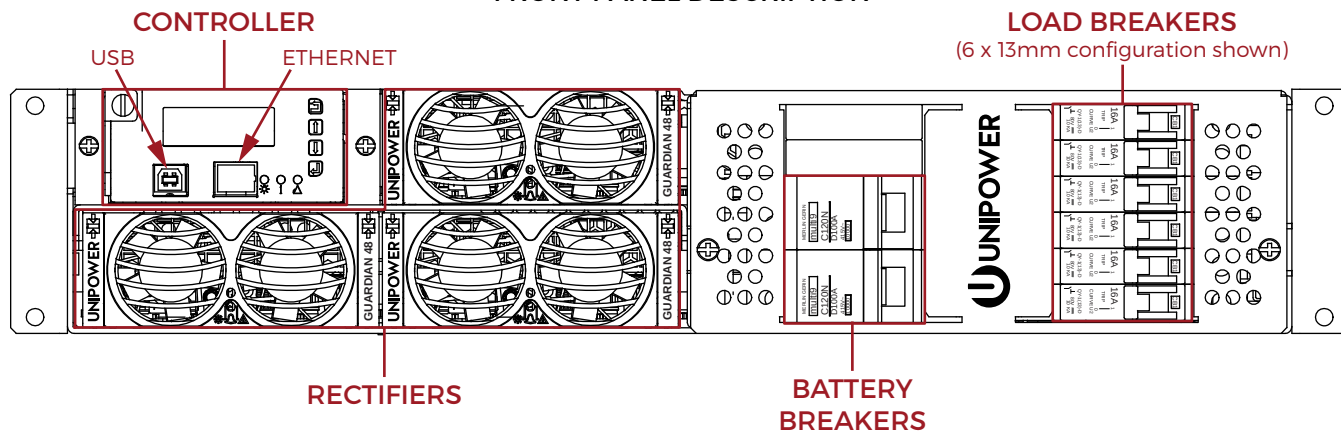


REAR PANEL DESCRIPTION

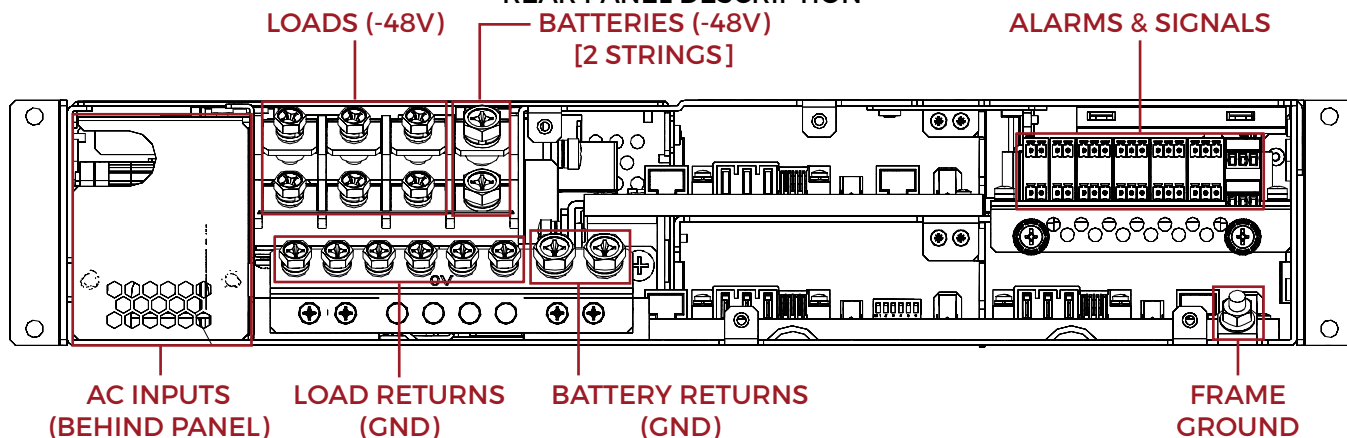

PERSPECTIVE REAR VIEW

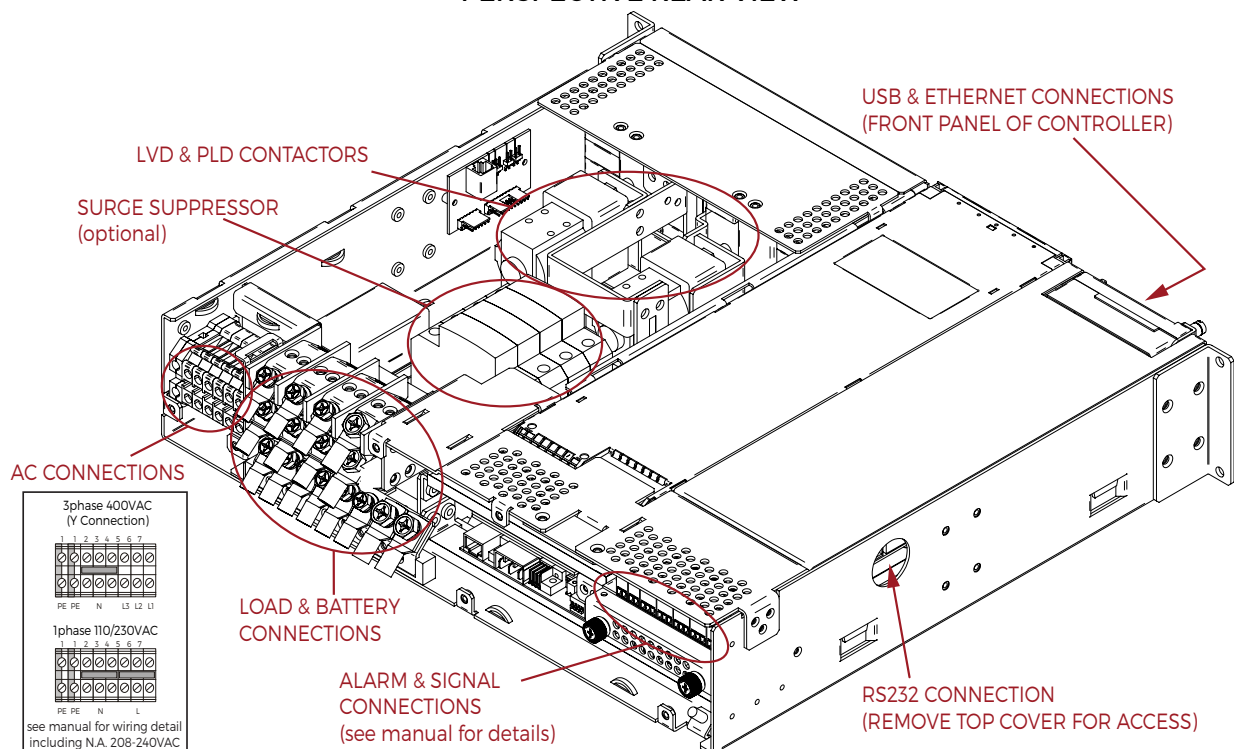

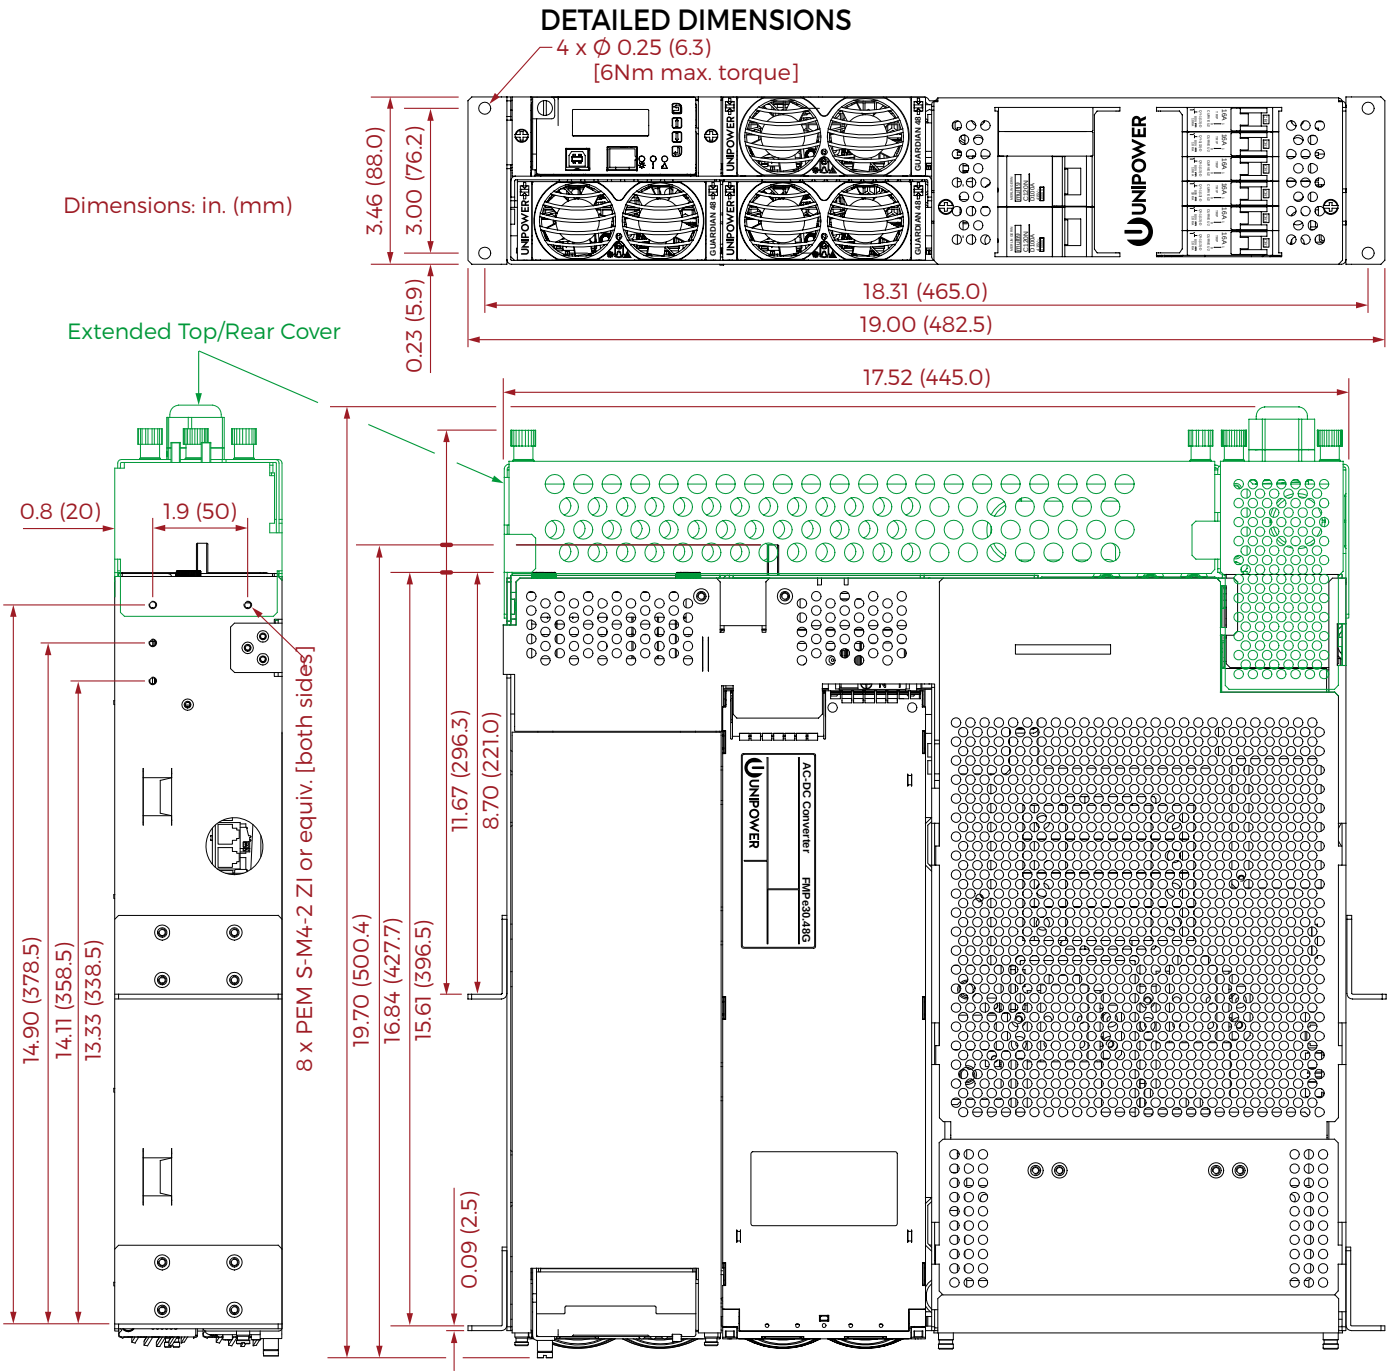

REAR VIEWS



WEIGHTS & DIMENSIONS

UNIT	UNIT				PACKAGED				
	Width	Height	Depth	Weight	Width	Height	Depth	Weight	# in box
System Unit (Standard)	19.00 (482.5)	3.46 (88.0)	16.84 (427.7)	32 lbs (14.5 kg)	22.5 (570)	8.3 (210)	19.3 (490)	35 lbs (16 kg)	1
System Unit (Extended Top)			19.70 (500.4)	33 lbs (15.0 kg)	22.5 (570)	8.3 (210)	22.5 (570)	37 lbs (17 kg)	1
Rectifier Module	4.2 (107)	1.6 (41)	14.0 (355)	4.6 lbs (2.1 kg)	15.5 (394)	2.3 (58)	8.2 (208)	4.8 lbs (2.2 kg)	1

Dimensions in inches (mm)

CONFIGURATION GUIDE

PLEASE COMPLETE THE BELOW TABLE AND SUBMIT TO UNIPOWER FOR VERIFICATION AND CONF. NO. ALLOCATION (This form is fully interactive and may be completed electronically OR it can be printed and complete by hand)							
STEP 1 - CUSTOMER DETAILS							
Company: _____ Address: _____ Zip Code: _____ Country: _____			Contact Name: _____ Email Address: _____ Telephone: _____ Quantity for quotation: _____				
STEP 2 - CHASSIS TYPE - Choose one version							
2 x Battery Breakers + 6 x 13mm Load Breakers 2 x Battery Breakers + 5 x 18mm Load Breakers			2 x Batt. + 6 x 13mm OR 2 x Batt. + 5 x 18mm				
STEP 3 - RECTIFIER MODULES - Choose one type only and enter quantity between 1 and 3 - dummies will be inserted into unused slots							
FMPe20.48 - 2000W / 40A - >96% Efficiency FMP20.38 - 2500W / 52A - >92% Efficiency FMPe30.48 - 2900W / 60A - >95% Efficiency			Qty 1 OR Qty 2 OR Qty 3 OR Qty 1 OR Qty 2 OR Qty 3 OR Qty 1 OR Qty 2 OR Qty 3				
STEP 4 - CONTROLLER & ALARM INTERFACE - Select desired controller and alarm interface							
ACC Extended with SD Card Slot (default configuration) ACC Extended without SD Card Slot			WITH SD card slot OR WITHOUT SD card slot				
Alarm Interface - 4 Relays or 10 Relays			4 Relays OR 10 Relays				
STEP 6 - BATTERY BREAKERS - Choose rating and quantity or NONE (Breakers MUST be identical rating)							
No Breakers (Not recommended) OR 80A x1 or x2 OR 100A x1 or x2 OR 125A x1 or x2			None OR Qty 1 OR Qty 2 OR Qty 1 OR Qty 2 OR Qty 1 OR Qty 2				
STEP 7 - PARTIAL LOAD DISCONNECT (PLD) - Select YES or NO (default)							
125A PLD (non-critical load / load shed disconnect)			YES OR NO				
STEP 8 - LOAD BREAKERS - Choose quantity for desired ratings - maximum 5 positions for 18mm or 6 positions for 13mm When the PLD option is not selected populate only LVD 'critical' circuits column. [Configuration will be checked by UNIPOWER]							
			LVD CIRCUITS (Critical)		PLD CIRCUITS (non Critical)		
4A single pole (1 position) [available both chassis types]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
6A single pole (1 position) [available both chassis types]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
10A single pole (1 position) [available both chassis types]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
16A single pole (1 position) [available both chassis types]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
20A single pole (1 position) [available both chassis types]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
25A single pole (1 position) [available both chassis types]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
32A single pole (1 position) [available both chassis types]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
40A single pole (1 position) [available both chassis types]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
50A single pole (1 position) [available 5 x 18mm chassis only]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
63A single pole (1 position) [available both chassis types]			Quantity ____ (1 to 5 or 6 max.)		Quantity ____ (1 to 5 or 6 max.)		
80A two pole (2 position) [available 6 x 13mm chassis only]			Quantity ____ (1 to 2 or 3 max.)		Quantity ____ (1 to 2 or 3 max.)		
100A two pole (2 position) [available 6 x 13mm chassis only]			Quantity ____ (1 to 2 or 3 max.)		Quantity ____ (1 to 2 or 3 max.)		
125A three pole (3 position) [available 6 x 13mm chassis only]			Quantity ____ (1 ONLY)		Quantity ____ (1 ONLY)		
150A three pole (3 position) [available 6 x 13mm chassis only]			Quantity ____ (1 ONLY)		Quantity ____ (1 ONLY)		
STEP 9 - TEMPERATURE SENSOR - available for battery and ambient temperature measurement							
Battery Temperature Sensor			NONE OR 3m (-10ft) OR 6m (-20ft)				
Ambient Temperature Sensor			NONE OR 3m (-10ft) OR 6m (-20ft)				
STEP 10 - SYMMETRY CABLES (Choose maximum 4 total end measure OR 3 mid measure)							
Symmetry Cable - 1.9m (-6ft) - end measure			NONE	Qty 1	Qty 2	Qty 3	Qty 4
- 3.0m (-10ft) - end measure			NONE	Qty 1	Qty 2	Qty 3	Qty 4
- 6.0m (-20ft) - end measure			NONE	Qty 1	Qty 2	Qty 3	Qty 4
OR			OR				
- 2.3m (-7.2ft) - mid measure			NONE	Qty 1	Qty 2	Qty 3	
STEP 11 - OPTIONS & ACCESSORIES (Select required items)							
Standard Top/Rear Cover OR Extended Top/Rear Cover			Standard Top/Rear OR Extended Top/Rear				
Surge Protection Kit (factory fit)			NONE OR 1-phase OR 3-phase				
3-phase EMI Filter [required with FMP25.48] (factory fit)			NONE OR YES				
RS232 Cable - 1m (-3ft) - RJ45 to DB9			NONE OR YES				
STEP 12 - SUBMIT COMPLETED FORM TO UNIPOWER FOR CHECKING AND ALLOCATION OF CONFIGURATION PART NUMBER							
Configuration Part Number: 1-MS0028G_____ (leave blank for completion by UNIPOWER)							